



# EVERHOT

AUTOMATIC ELECTRIC WATER HEATER

ITALIAN TECHNOLOGY



CALL  
**800 EVERHOT**

Manufactured by  
AL HURAIZ ESTABLISHMENT FOR INDUSTRY  
P.O.BOX. 10159, DUBAI, UAE  
Tel: +9714 2671777, 2671553, Fax: +9714 2671375  
Email: sales@alhuraizgroup.ae, Website: www.alhuraizgroup.ae



# EVERHOT WATER HEATER FEATURES

## INNER TANK

The inner tank of Automatic Electric Water Heater is made of high quality thick hot dipped galvanized steel

## INSULATION

Heaters are thermally insulated with high density CFC free polyurethane (PUF) filled around the inner tank of excellent heat retention which minimizes heat loss and ultimately saves energy.

## \*HEATING ELEMENT

High quality Italian make, pure copper sheathed heating element (thread in type) permits rapid thermal exchange & easy to replace.

## \*DOUBLE SAFETY THERMOSTAT

The Italian thermostat is combined with the temperature regulator and safety cut off. The system has double pole safety overheating control mechanism which cut off supply power

automatically in the event of failure of main thermostat.

## OUTER BODY

The outer body is made of superior quality steel and electrostatically powder coated with the high gloss epoxy Polyester (white) to give superior finish and long-lasting life.

## ANTI SPLASH MECHANISM


Directs incoming cold water to bottom of the tank, thereby eliminates at upper portion, mixing of cold and hot water hence and ensures continuous supply of hot water at all times.

## SAFETY VALVE

Twin function non-return cum safety valve which maintains pressure inside the tank, hence prevent expansion / explosion of the inner tank, in the event of thermostat failure. Also, this valve helps to retain water inside the tank thereby prevents draining of water and element burnout.

## STANDARD TECHNICAL SPECIFICATIONS

Model	Capacity	Dimensions in 'mm' Tolerance: +/- 5mm					Rated Power	Packing Details		
		A	B	C	D	E		Length x Width x Height +/- 5mm	Gross Weight +/- 1 Kg	Quantity in (1x40) HC Container
H-Horizontal V-Vertical	Litres	A	B	C	D	E	Watts	Length x Width x Height +/- 5mm	Gross Weight +/- 1 Kg	Quantity in (1x40) HC Container
FEH40-030V	30	420	NA	120	400	NA	1200	430 x 430 x 520	11.40	675
FEH40-050V	50	620	360	130	400	NA	1200	430 x 430 x 700	16.20	486
FEH40-050V (SF)	50	460	NA	120	450	NA	1200	480 x 480 x 580	17.10	432
FEH40-065V	65	770	510	130	400	NA	1200	430 x 430 x 860	19.10	405
FEH40-080V	80	950	675	130	400	NA	1500	430 x 430 x 1020	24.10	324
FEH40-080V (SF)	80	700	400	150	450	NA	1500	480 x 480 x 760	23.10	336
FEH40-100V	100	1070	810	130	400	NA	1500	430 x 430 x 1160	27.90	270
FEH40-030H	30	650	350	155	350	185	1200	400 x 400 x 720	14.25	594
FEH40-050H	50	620	360	130	400	240	1200	430 x 430 x 700	16.20	486
FEH40-065H	65	770	510	130	400	240	1200	430 x 430 x 860	19.10	405
FEH40-080H	80	950	675	130	400	240	1500	430 x 430 x 1020	24.10	324
FEH40-080H (SF)	80	700	400	150	450	180	1500	480 x 480 x 760	23.10	336
FEH40-100H	100	1070	810	130	400	240	1500	430 x 430 x 1160	27.90	270

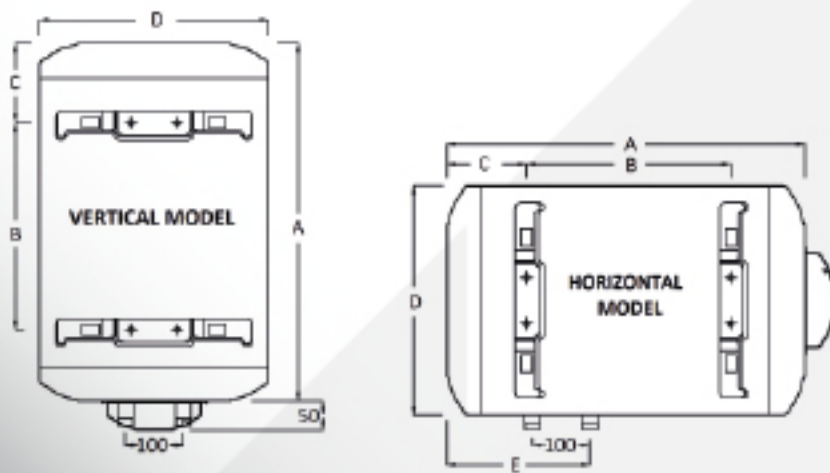

Max. Working Pressure: 0.8MPa  
Rated Voltage: 220-240VAC, 1 Phase  
Frequency: 50-60-Hz

Safety Cutout: 90°C  
Inlet / Outlet Pipe Sizes: ½" (15NB) BSPT  
Degree of Protection: IPX1

Thermostat Rating: 16 Amps  
Max Thermostat setting: 70°C

### NOTE

Warranty: Each water heater is guaranteed against manufacturing defects and tank leakages. For detailed warranty term and conditions please refer our current 'Warranty Certificate'. All water heaters are supplied with user / installation instructions and warranty card. \*All Heating elements and Thermostat complies to the international standards and requirements. Relevant Standard: IEC 60335-1:2010+A1+A2 / IEC 60335-2-21:2012+A1.

EVERHOT Water heaters are tested by IEC CB accredited lab (TUV) and certified by Emirates authority for standardization and Metrology (ESMA) UAE with Emirates Quality Mark(EQM) and G Mark.